

USAARL Report No. 2000-19

# Noise Levels in the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator

by Elmaree Gordon and William A. Ahroon



Aircrew Protection Division

August 2000

Approved for public release, distribution unlimited.

U  
S  
A  
A  
R  
L

U.S. Army  
Aeromedical Research  
Laboratory

## Notice

### Qualified requesters

Qualified requesters may obtain copies from the Defense Technical Information Center (DTIC), Cameron Station, Alexandria, Virginia 22314. Orders will be expedited if placed through the librarian or other person designated to request documents from DTIC.

### Change of address

Organizations receiving reports from the U.S. Army Aeromedical Research Laboratory on automatic mailing lists should confirm correct address when corresponding about Laboratory reports.

### Disposition

Destroy this document when it is no longer needed. Do not return it to the originator.

### Disclaimer

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other official documentation. Citation of trade names in this report does not constitute an official Department of the Army endorsement or approval of the use of such commercial items.

### Human use

Human subjects participated in these studies after giving their free and informed voluntary consent. Investigators adhered to AR 70-25 and USAMRMC Reg 70-25 on Use of Volunteers in Research

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

1a. REPORT SECURITY CLASSIFICATION Unclassified		1b. RESTRICTIVE MARKINGS									
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION/ AVAILABILITY OF REPORT Approved for public release, distribution unlimited									
2b. DECLASSIFICATION/ DOWNGRADING SCHEDULE		4. PERFORMING ORGANIZATION REPORT NUMBER(S) USAARL Report No. 2000-19									
6a. NAME OF PERFORMING ORGANIZATION U.S. Army Aeromedical Research Laboratory		6b. OFFICE SYMBOL (If MCMR-UAD	7a. NAME OF MONITORING ORGANIZATION U.S. Army Medical Research and Materiel Command								
6c. ADDRESS (City, State, and ZIP Code) P.O. Box 620577 Fort Rucker, AL 36362-0577		7b. ADDRESS (City, State, and ZIP Code) 504 Scott Street Frederick, MD 21702-5012									
8a. NAME OF FUNDING/ SPONSORING ORGANIZATION	8b. OFFICE SYMBOL (If	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER									
8c. ADDRESS (City, State, and ZIP Code)		10. SOURCE OF FUNDING NUMBERS <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <th style="width: 25%;">PROGRAM ELEMENT NO.</th> <th style="width: 25%;">PROJECT NO.</th> <th style="width: 25%;">TASK NO.</th> <th style="width: 25%;">WORK UNIT ACCESSION NO.</th> </tr> <tr> <td style="text-align: center;">622787</td> <td style="text-align: center;">878</td> <td></td> <td style="text-align: center;">DA360347</td> </tr> </table>		PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT ACCESSION NO.	622787	878		DA360347
PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT ACCESSION NO.								
622787	878		DA360347								
11. TITLE (Include Security Classification) (U) Noise Levels in the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator											
12. PERSONAL AUTHOR(S) Elmaree Gordon and William A. Ahroon											
13a. TYPE OF REPORT Final	13b. TIME COVERED FROM TO	14. DATE OF REPORT (Year, Month, Day) 2000 July	15. PAGE COUNT 9								
16. SUPPLEMENTAL NOTATION											
17. COSATI CODES <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <thead> <tr> <th style="width: 33%;">FIELD</th> <th style="width: 33%;">GROUP</th> <th style="width: 33%;">SUB-GROUP</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">03</td> <td style="text-align: center;">01</td> <td></td> </tr> </tbody> </table>		FIELD	GROUP	SUB-GROUP	03	01		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) helicopters, noise levels, simulators			
FIELD	GROUP	SUB-GROUP									
03	01										
19. ABSTRACT (Continue on reverse if necessary and identify by block number) Noise levels in the NUH-60 (Black Hawk) Aeromed Flight Simulator located at the U.S. Army Aeromedical Research Laboratory were measured. Noise levels were adjusted using a nine-position control set by the simulator operator. The simulator operator's manual stated that noise levels should not exceed 85 dBA. Measurements were made at five noise level settings at the pilot and copilot stations. Results showed that the A-weighted sound level of the flight simulator at Noise Level Setting 1 was 81.8 dBA while levels at Settings 3, 5, 7, and 9 exceeded the 85 dBA noise exposure limit. In addition, the octave-band frequency spectrum of the simulator noise at Setting 9 differed appreciably from the spectrum of an actual UH-60A aircraft. These differences were particularly large (exceeding 20 dB) in the upper frequencies in the speech range and should be considered before similar research involving communication or speech intelligibility is conducted. It is noted that noise hazard signs are posted appropriately at the entrance to the USAARL NUH-60 flight simulator in accordance with MIL-STD-1474D "Noise Limits." Hearing protective devices should be used in the simulator when operated at noise levels above the lowest noise level setting.											
20. DISTRIBUTION/ AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS		21. ABSTRACT SECURITY CLASSIFICATION Unclassified									
22a. NAME OF RESPONSIBLE INDIVIDUAL Chief, Science Support Center		22b. TELEPHONE (Include Area Code) (334) 255-6901	22c. OFFICE SYMBOL MCMR-UAX-SS								

Table of contents

	<u>Page</u>
Introduction.....	1
Flight simulator.....	1
Methods.....	3
Results.....	4
Discussion.....	4
Conclusions.....	8
References.....	10

List of figures

1. Exterior view of the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator.....	2
2. Cockpit of the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator. Note that noise measurements were made without crewmembers present.....	3
3. Sound pressure levels in the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator at noise level settings 1, 3, 5, 7, and 9, at pilot location, during flat pitch operation with main rotor speed at 100 percent, collective full down, and cockpit doors closed.....	7
4. A-weighted sound levels in the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator at five noise level settings, at pilot location, during flat pitch operation with main rotor speed at 100 percent, collective full down, and cockpit doors closed.....	7
5. Sound pressure levels in the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator at noise level setting 9, at pilot location, during flat-pitch operation with main rotor speed 100 percent, collective full down, and cockpit doors closed, and a UH-60A helicopter at pilot location, during 120-knot cruise with doors closed.....	8

List of tables

1. Sound pressure levels in dB for each octave band center frequency shown and A-weighted sound levels at the pilot and copilot locations in a UH-60A Black Hawk helicopter during 120 knot cruise with doors closed.....	5
---	---

Table of contents (continued)  
List of tables (continued)

	<u>Page</u>
2. Sound pressure levels in dB at noise level settings 1, 3, 5, 7, and 9 for each octave band center frequency shown and A-weighted sound levels at the pilot and copilot locations in the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator during flat-pitch operation, main rotor speed 100 percent, collective full down, and cockpit doors closed .....	8

## Introduction

Sound pressure levels inside military helicopters during flight almost always exceed the noise exposure limits established by the Department of Defense Hearing Conservation Program criteria (DODI 6055.12, 1991). Noise levels during some flight conditions exceed the capabilities of the required hearing protective devices, helmets and earplugs, to provide effective hearing protection and maintain effective voice communication in the aircraft. The United States Army Aeromedical Research Laboratory (USAARL) has been investigating various techniques to reduce noise exposure for the helicopter crewmember and improve voice communication in even the noisiest conditions. Since military helicopter pilots receive much of their training in flight simulators, assessment of some noise reduction and voice communications techniques may be conducted in the USAARL Black Hawk flight simulator. It was, therefore, necessary to measure actual sound pressure levels in the simulator cockpit.

According to the simulator's technical/operator's manual (TM 55-6930-217-10, 1989), environmental sound cues are available at nine levels and are limited to a maximum of 85 dB. However, there is no readily-available test data documenting the noise levels or spectra in the simulator cockpit. In this study, we measured sound pressure levels in the USAARL NUH-60 (Black Hawk) Flight Simulator cockpit at five noise level settings. These data were compared with sound pressure levels measured in a UH-60A Black Hawk Helicopter (Mace et al; 1981) to determine the simulator noise level setting that would best duplicate the actual UH-60A helicopter flight environment.

### Flight simulator

The UH-60 Black Hawk flight simulator is a fixed-base, full-motion simulator and is designed to be used for training in aircraft control, cockpit preflight, start, run up, shutdown, normal and emergency procedures, instrument flight operations, visual flight operations, sling-load operations, external stores subsystems, night vision goggles, Doppler and Global Positioning System operation, nap-of-the-earth flight, low-level flight, and contour flight.

The USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator (Figure 1) has been permanently modified for the collection of aeromedical data during helicopter flight simulation over a range of controlled environmental conditions, but also can be used for training aviators in the use of the UH-60A/UH-60L Black Hawk helicopter. Primarily used for aeromedical research, the USAARL NUH-60 provides a means of safe exposure of the pilot and copilot to adverse flight conditions under controlled and monitored conditions. The simulator is instrumented for the collection of a wide range of aeromedical research data. A central computer system controls the operation of the simulator complex and provides for storage of data on a computer for later analysis.



Figure 1. Exterior view of the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator.

The flight simulator compartment houses a cockpit with pilot and copilot stations (Figure 2) and is isolated from the instructor/operator station (IOS), and observer station. Communication among between the operator, observer, and cockpit occupants is provided through an administrative intercommunication system (ICS) network. Pilot and copilot performance is monitored at the IOS. The simulator is equipped with a full-color visual system, combined with digitally- generated imaging that simulates natural helicopter environment surroundings.

Analog sound generation is provided under computer control. Several loudspeakers in the cockpit simulate aural cues provided by the actual aircraft. Environmental aircraft sound is available at nine levels, selected at the control console by the simulator operator. The motion system provides cues of pitch roll, yaw, vertical, longitudinal, and lateral. The pilot/copilot seats are vibrated individually to simulate both continuous and periodic oscillations and vibrations experienced by the crew during normal and emergency flight conditions and maneuvers

including vibrations representing progressive malfunctions. Both motion and vibration are selected or deselected at the IOS.



Figure 2. Cockpit of the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator. Note that noise measurements were made without crewmembers present

### Methods

Measurements were made in the USAARL NUH-60 (Black Hawk) Flight Simulator, Serial Number 85-00009. From the control console, the operator ran the simulator at “flat-pitch” operation, with main rotor speed at 100 percent, collective at full-down position, and cockpit doors closed, simulating operation of the aircraft on the ground in preparation for flight. In accordance with MIL-STD-1474D (1997), measurements were made without crewmembers in the cockpit. The measuring microphones were placed at pilot (right seat) and copilot (left seat) center-of-head locations, at a distance of 80 centimeters above the seat reference, as specified in MIL-STD-1474D (1997). Measurements were made at noise level settings 1, 3, 5, 7, and 9.

Sound pressure levels in the cockpit were measured using two Brüel and Kjær (B&K) Type 4165 ½-inch free-field microphones. Each microphone was coupled to a B&K Type 2639 microphone preamplifier. Each preamplifier was coupled to one of the four

channels of a B&K Type 5968 acoustic front-end. The output of each channel of the acoustic front-end was coupled to one of four independent channels of a SONY Model PC204A DAT instrumentation cassette recorder. The recording system was calibrated to absolute sound pressure level using an acoustic reference signal produced by a B&K Type 4220 pistonphone. Two minutes of simulator noise at each noise level setting were recorded. Octave-band and overall A-weighted levels were measured offline by running the recorded signal through a Larson-Davis Model 3100 Real-time Analyzer.

During recordings, the simulator operator wore a protective communications headset and the research investigator wore a protective communications earplug (CEP). Sound pressure levels at the simulator IOS and observer station were not measured.

## Results

Table 1 shows octave band sound pressure levels, with center frequencies from 31.5 Hz to 8000 Hz and A-weighted sound levels, measured at the pilot and copilot locations in the UH-60A helicopter during 120 knot cruise with doors closed. Sound pressure levels in octave bands with center frequencies from 31.5 Hz to 8000 Hz and A-weighted sound levels in the USAARL NUH-60 flight simulator measured at the five noise level settings for pilot and copilot locations are shown in Table 2. Sound pressure levels at the pilot and copilot locations are virtually identical at each simulator noise level setting and in the helicopter. Therefore, only the pilot data are referenced throughout the rest of this report.

Figure 3 shows sound pressure levels at the NUH-60 pilot location at the five noise level settings measured. The A-weighted levels for the five noise level settings measured at the pilot location are shown in figure 4. Only noise level setting 1, at 81.8 dBA, is below the 85 dBA limit defined in DODI 6055.12 (1991). Sound pressure levels at settings 3, 5, 7, and 9 exceed this limit. The A-weighted levels of the simulator at noise level setting 9 and the helicopter at 120 knots are within 2 dBA of each other. At noise level setting 9, simulator sound pressure levels are lower than the helicopter sound pressure levels by about 6 dB at 1000 Hz, 13 dB at 2000 Hz, 21 dB at 4000 Hz, and 10 dB at 8000 Hz (Figure 5).

## Discussion

One important observation made in this report is that the 85 dBA noise exposure limit established by Army regulation is exceeded at all but the lowest measured noise level setting. Therefore, care should be taken to ensure that crew occupants of the USAARL NUH-60 flight simulator wear hearing protection any time it is operated at any of the higher noise level settings.

Ideally, for noise and speech research to be performed in the simulator, noise spectra during flight simulation should be the same as the helicopter across the frequency spectrum. However, at some frequencies, the USAARL NUH-60 simulator differs considerably from the UH-60A helicopter (Figure 5). The 40 dB difference at 31.5 Hz may be due to the absence of rotor blade noise. Aerodynamically-generated noise is created at the rotor blade pass frequency of 17 Hz with a harmonically-related repetition occurring near 31.5 Hz. More importantly, in the speech range, 1000 Hz to 4000 Hz, as mentioned above, simulator levels are considerably lower than the helicopter noise. These differences in frequency spectra should be considered before proceeding with research involving speech stimuli. The addition of small portable audio loudspeakers did not change the noise spectra of the simulator. Since the USAARL NUH-60 simulator is maintained by contractor services, it was also determined that adding additional permanent audio speakers to the cabin involved a level of expense and difficulty beyond the added value of altering the structure of the simulator.

Table 1.

Sound pressure levels in dB for each octave band center frequency shown and A-weighted sound levels at the pilot and copilot locations in a UH-60A Black Hawk helicopter during 120 knot cruise with doors closed.

	<u>Frequency (Hz)</u>									
	31.5	63	125	250	500	1000	2000	4000	8000	dBA
Pilot	108	100	102	107	96	91	88	85	85	101
Copilot	112	101	101	100	94	89	88	84	83	97

Table 2.

Sound pressure levels in dB at noise level settings 1, 3, 5, 7, and 9 for each octave band center frequency shown and A-weighted sound levels at the pilot and copilot locations in the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator during flat-pitch operation, main rotor speed 100 percent, collective full down, and cockpit doors closed.

Level setting	<u>Frequency (Hz)</u>									dBA
	31.5	63	125	250	500	1000	2000	4000	8000	
Level 1										
Pilot	67.2	78.8	84.6	90.7	75.5	69.6	66.1	60.1	58.4	81.8
Copilot	66.9	79.9	86.0	90.1	75.1	70.4	65.0	58.4	56.8	81.4
Level 3										
Pilot	68.0	85.9	91.9	98.0	82.6	75.4	67.6	60.4	62.9	88.9
Copilot	67.5	87.4	93.6	97.6	81.6	76.8	67.4	58.8	62.5	88.6
Level 5										
Pilot	68.9	90.8	96.9	103.4	87.6	80.0	69.9	61.1	67.8	94.0
Copilot	68.3	92.2	98.6	103.0	86.6	81.4	70.8	59.9	68.5	93.9
Level 7										
Pilot	69.3	93.3	99.4	106.3	90.8	83.2	72.6	62.3	72.3	97.0
Copilot	69.2	95.1	101.2	105.9	89.8	84.6	73.7	61.5	70.8	96.8
Level 9										
Pilot	70.0	94.8	101.0	108.0	92.5	85.3	74.9	64.1	74.8	98.8
Copilot	70.6	96.7	102.9	107.7	91.5	86.5	76.1	63.3	73.0	98.6

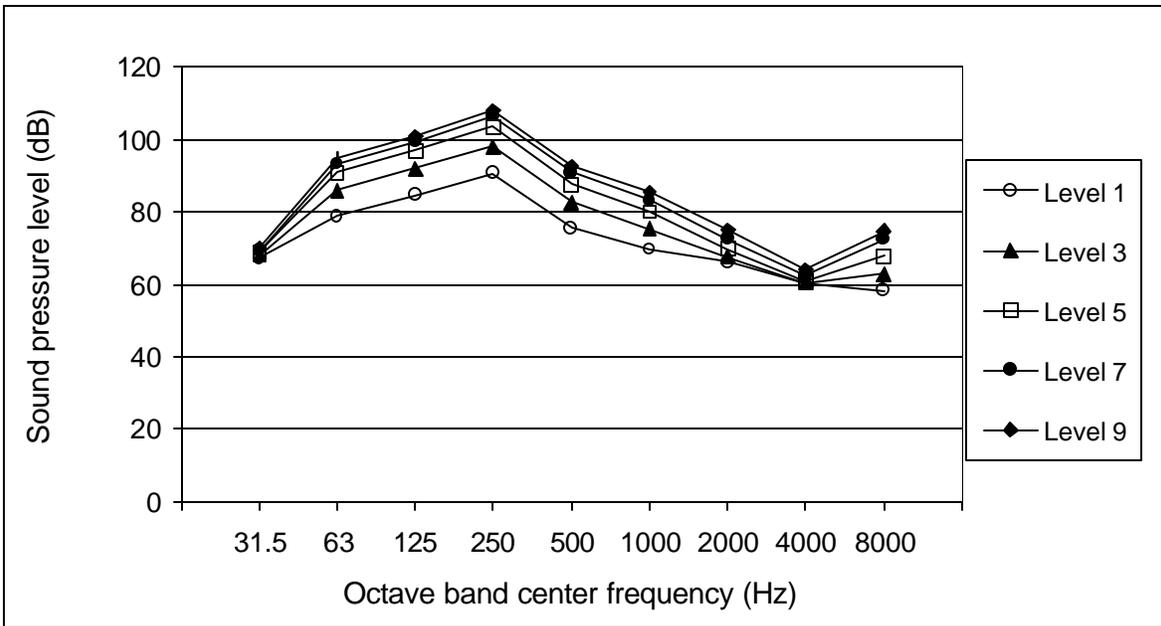


Figure 3. Sound pressure levels in the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator at noise level settings 1, 3, 5, and 9, at pilot location, during flat pitch operation with main rotor speed at 100 percent, collective full down, and cockpit doors closed.

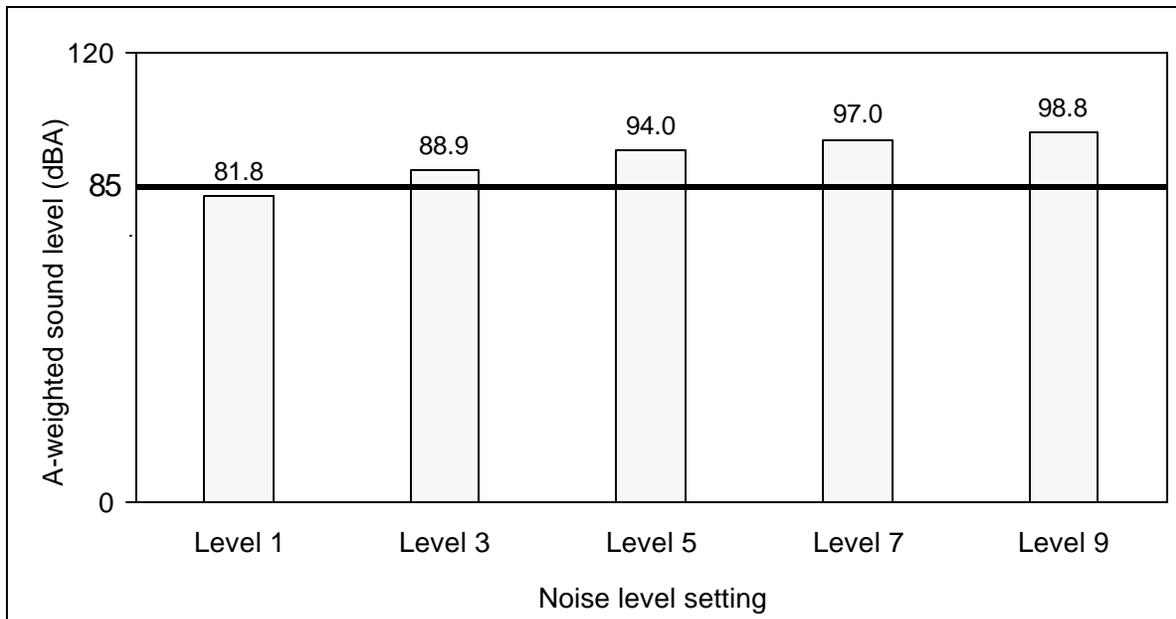


Figure 4. A-weighted sound levels in the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator at five noise level settings, at pilot location, during flat pitch operation with main rotor speed at 100 percent, collective full down, and cockpit doors closed.

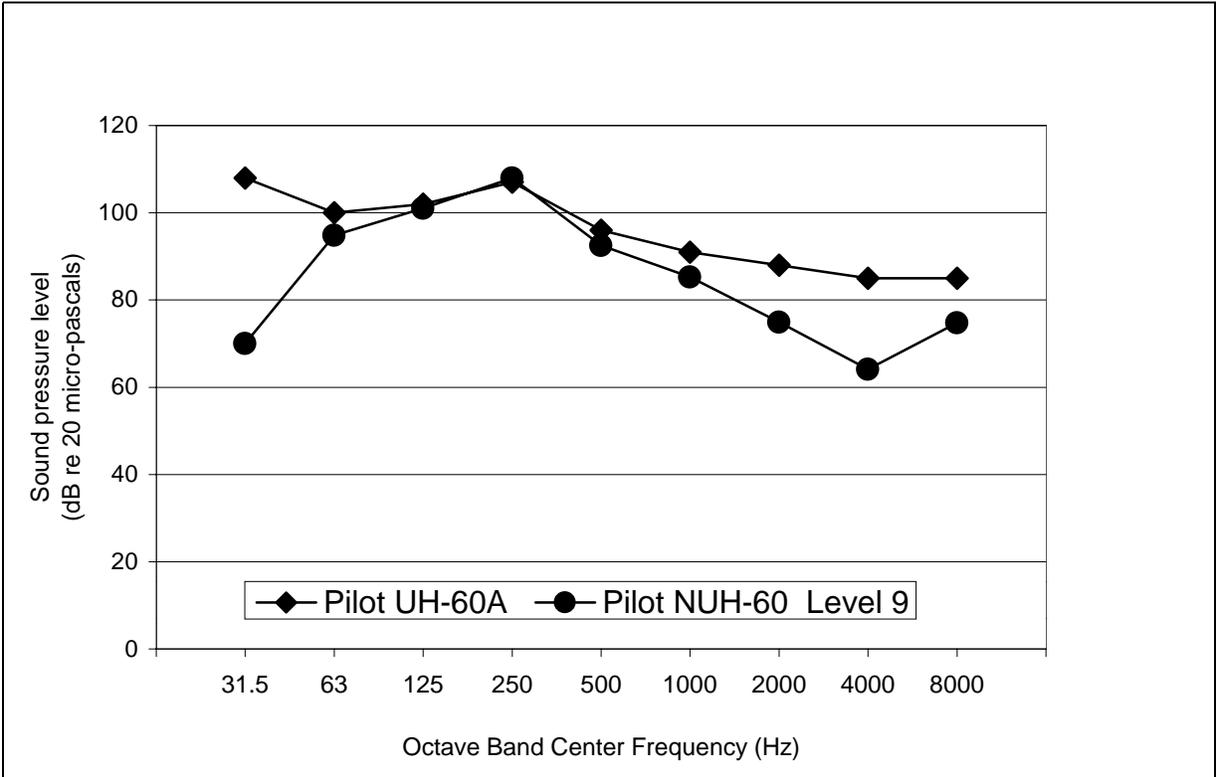


Figure 5. Sound pressure levels in the USAARL NUH-60 (Black Hawk) Aeromed Flight Simulator at noise level setting 9, at pilot location, during flat-pitch operation with main rotor speed 100 percent, collective full down, and cockpit doors closed, and a UH-60A helicopter at pilot location, during 120-knot cruise with doors closed.

### Conclusions

Standard flight simulator training and most USAARL research protocols in the USAARL NUH-60 simulator are conducted at noise level setting 1, which is below the 85 dBA limit. All other noise level settings measured during this study exceeded the 85 dBA limit.

It is noted that noise hazard caution signs on the USAARL NUH-60 simulator are posted appropriately as specified in MIL-STD-1474D. It is recommended that volunteers participating in research protocols that require operation of the simulator at or above noise level setting 3 should be required to wear protective helmets, muffs, or earplugs. Any one of these hearing protective devices meets the requirements for protection against sound pressure levels that exceed the limit as specified by Department of Army Hearing Conservation policy (DA PAM 40-501, 1991).

before proceeding with research involving speech stimuli. Ideally, such tests would be conducted in a helicopter; but the necessity for a controlled flight environment precludes conducting such tests in an aircraft. However, where there is a requirement for the UH-60 flight environment and accomplishment of tasks typically required during flight, the USAARL NUH-60 flight simulator provides a controlled and monitored flight environment for testing some noise reduction and speech communications techniques.

## References

- Department of Defense. 1997. Noise limits. Washington DC: Military standard 1474D (MIL-STD-1474D).
- Department of Defense. 1991. Hearing Conservation Program. Washington DC: Department of Defense Instruction 6055.12 (DODI 6055.12).
- Department of the Army. 1991. Hearing Conservation. Washington DC: Department of the Army Pamphlet 40-501 (DA-PAM 40-501).
- CAE-LINK Corporation. 1989. Technical Manual Operator's Manual For UH-60 (Black Hawk) Aeromed Flight Simulator. TM 55-6930-217-10.
- Mace, E.E., Jr., Followill, R.J., Stokes, J.L., Dickson, J.D., and Carnley, L.V. 1981. Final Report Production Validation Test-Government (PVT-G) Reliability, Availability, Maintainability, and Durability (RAMD-D) of the UH-60A (BLACK HAWK) Helicopter. Appendix F, Part 5. Fort Rucker, AL: United States Army Aviation Development Test Activity. TECOM Project No. 4-AI-170-UTT-010.